



Technical Datasheet

Overview

- Compact Digital Mixer for Live, Studio and Installation
- 48 Input Channels
- 24 Local Mic Inputs (XLR)
- 2 1/4" Stereo Inputs (TRS)
- 1 3.5mm Stereo Input
- 36 Total Busses
- 12 Stereo Mix (Aux or Group) + Main
- PAFL Bus
- 16 Assignable Local Outputs (14 XLR + 2 1/4" TRS)
- AES Digital Output
- Dedicated Talkback mic input (XLR)
- 1/4" TRS Headphone out with dedicated control
- SLink EtherCON connection for remote audio using dSnake, DX or gigaACE protocol (64x64 channels)
- I/O Port for Option Card (including 3rd party protocols – Dante/Waves)
- 8 Mute Groups
- 8 DCA Groups
- 8 Stereo FX with dedicated FX Returns
- DEEP Processing Ready
- RackFX Effects suite
- 7" colour touchscreen
- 16 Assignable SoftKeys
- 4 Assignable Soft Rotaries
- Dedicated physical controls for channel processing (Gain, HPF Frequency, Gate Threshold, Compressor Threshold, Pan, EQ Gain/Frequency/Width)
- 24+1 Faders with 6 Layers for 144 assignable Channel Strips
- Motorised faders for sends on faders, GEQ fader flip and mix recall
- 24 Backlit LCD Channel Strip displays
- Single Point Metering
- Integrated Surface Illumination
- Single/Dual Footswitch Control
- Input channel linking for stereo sources
- Patchable Insert points
- Input processing – Preamp, HPF, Gate, PEQ, Compressor, Delay
- Output processing – PEQ, Graphic EQ, Compressor, Delay
- Automatic Mic Mixing
- 31 Band Real Time Analyser
- Quick copy/paste/reset for parameters
- User Permissions to restrict operator access
- 300 Scene memories per show
- Channel Safes, Global and per Scene Recall Filters
- FX, processing and channel Libraries
- SQ-Drive for stereo and multitrack recording/playback direct to USB drive
- USB transfer of Scenes, Libraries, Shows
- 32x32 channel USB streaming to/from Mac/PC
- DAW Control driver for MIDI control via USB or TCP/IP
- Wireless remote mixing apps for iPad and Android
- Compatible with ME personal monitoring range

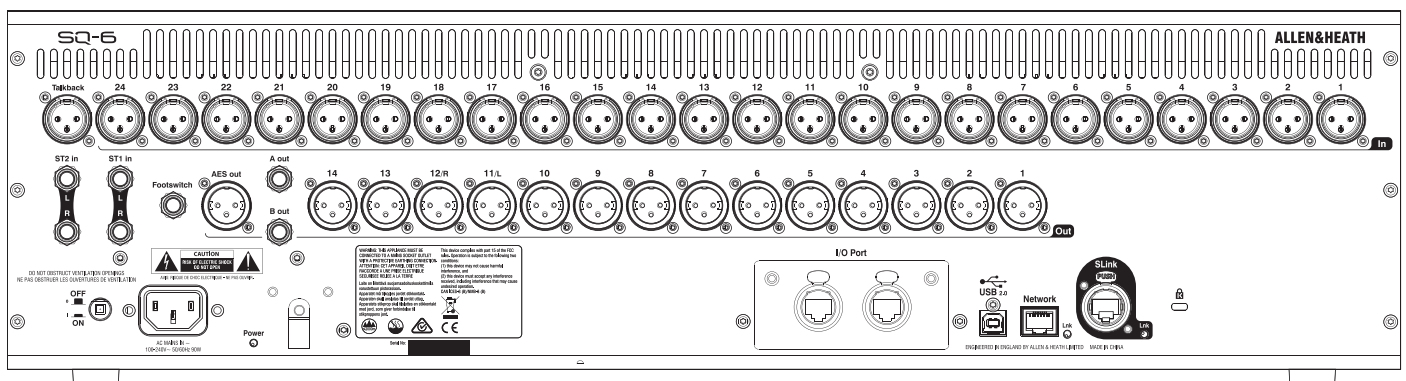

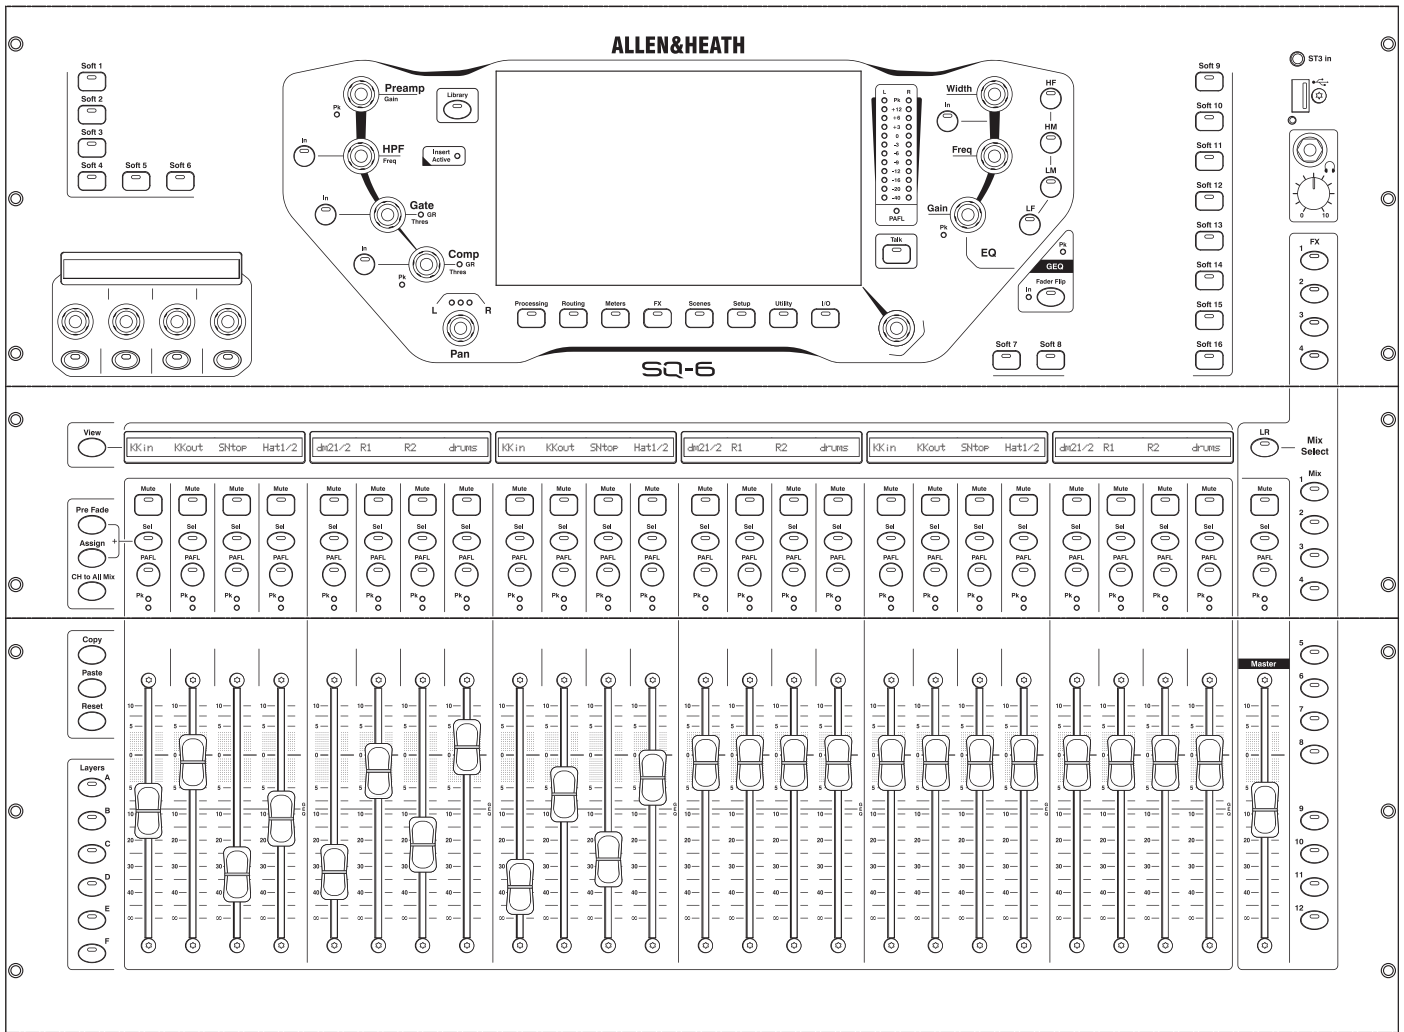

A&E Specifications

The mixer shall be a compact digital mixer built around a 96kHz XCVI FPGA core with 48 input channels mixing to LR and 12 stereo mix outputs.

The surface shall include 25 moving faders with 6 layers, each layer having dedicated keys, giving easy access to input channels, mixes, FX sends, FX returns, DCA masters and MIDI control.

Each fader strip shall have dedicated PAFL, Select, and Mute buttons with indicators, a variable LED meter, a peak indicator LED and variable colour backlit LCD display.

There shall be dedicated physical controls which allow for adjustment of key processing parameters, and which follow the select button for the input and output channels.

The fader and rotary controls shall be of a high contrast colour to the mixer surface for excellent visibility during operation in low light conditions. The rotary controls shall also be illuminated to indicate function and availability for use.

Send levels to mixes shall be displayed and adjusted using the faders.

Surface illumination shall be integrated into the bodywork of the mixer.

Local analogue inputs shall use balanced XLR sockets and connect to fully recallable digitally controlled preamplifiers. These shall be able to provide up to +60dB of gain, industry standard 48V phantom power, and include a switchable -20dB Pad to allow a maximum input level of +30dBu.

Local analogue outputs shall be provided on 14 XLR sockets and 2 balanced TRS ¼ inch Jack sockets. These will have a nominal line output of +4dBu and a maximum output of +22dBu.

There shall be a local "SLink" Ethernet audio expansion port with locking EtherCON connector, supporting multiple AoIP protocols and providing access to 64x64 digital channels, connected over a single cable 'digital snake' and allowing remote preamp control of Allen & Heath Remote Audio Units, as well as connection to Allen & Heath ME Personal Mixing Systems.

A digital I/O Port shall be provided to accept optional cards, supporting 64x64 channels and the ability to interface with 3rd party AoIP protocols such as Dante and Waves.

All input and output processing, routing options and system configuration shall be accessed and adjusted

via a 7-inch colour touchscreen and associated dedicated rotary control.
16 user-assignable SoftKeys with variable colour LED illumination shall be provided for quick access to Input/Mix/DCA/Group Mutes, Tap Tempo, Scene Controls, MMC and SQ-Drive Controls, as well as 4 assignable rotary encoders with LCD display showing their current function.
A footswitch connection shall be provided to allow assignable control from an optional single or dual footswitch.
There shall be dedicated keys for quick Copy/Paste/Reset of processing parameters and mixes.
The ability to assign channel on/off status and to switch between Pre/Post fade to the currently selected mix shall also be provided with dedicated keys.

All input channels shall contain the following processing: Polarity, Trim, Insert, Gate, High Pass Filter, Parametric EQ, Compressor, Delay, Pan.
All FX Return channels shall contain the following: Parametric EQ, Pan.
All output mix channels shall contain the following processing: External input, Polarity, Trim, Insert, Parametric EQ, and Graphic EQ with RTA and fader-flip mode, Compressor, Delay, Balance.
All signal delays in the system shall be adjustable in Milliseconds.

The mixer will allow the insertion of Allen & Heath DEEP processing models to channels, without affecting latency or processing abilities.

8 user-assignable effect racks shall be provided with a library of factory preset FX emulations. The FX racks shall be individually configurable as send/return from a channel or FX/Mix, or inserted into input or output channels.

There shall be 8 DCA groups and 8 Mute groups.

An Automatic Mic Mixer shall be provided for automatic and dynamic adjustment of gain in spoken word applications.

A global source option for the direct out of each input channel shall be provided in the routing screen. The tap-off point shall be adjusted to the following positions in the processing path: post Preamplifier, post HPF, post Gate, post Insert return, post PEQ, post Compressor, and post Delay. There shall be further global options to follow Fader, DCA and Mute.
Direct outputs shall be assignable via the mixer soft patch bay.

A Talkback facility shall be provided with the ability to send to any output mix with on screen status indication. An option to enable talkback latching and HPF shall be provided.

A signal generator shall be provided with the ability to send a variable level signal to any output mix with visual assignment status on-screen. The following types of signals shall be available: Sine, White Noise, Pink Noise, and Band-Pass.

Comprehensive input, output, and FX channel and RTA metering shall be provided on-screen.
12-LED bar meters on the surface shall indicate the Main mix bus level and the PAFL signal shall override the LR meters accompanied by a PAFL-active indicator.
A default Mains to PAFL sub-mix shall be provided.

There shall be a USB Type-A connector on the surface for stereo/multitrack recording/playback, data-transfer, archiving, and firmware updates direct to USB drives.
On the rear panel there shall be a USB-B connection following the USB 2.0 standard for multi-channel, bi-directional audio streaming and MIDI DAW control between the mixer and a computer.
A DAW transport control using popular DAW control protocols for computer shall be available via the touch-screen.

Stereo digital output shall be provided on XLR following the AES/EBU standard and with switchable sample rates.

The mixer shall provide a Fast Ethernet (100 Mbit/s) port for Cat5 cable connection to a computer for MIDI over TCP/IP control of mixer parameters via a wireless router (access point) for live mixing control, and the mixing system shall include application software for tablet and phone devices connected via a wireless network router to the LAN port.

Input and output channel processing and parameters in the mixer shall be saved on demand as a user library item for recall in other channels. All library items shall be archived with the show-file. Library items shall be transferrable to USB drive as portable data to be used in other systems.

The mixer shall provide the facility to save 300 scenes of the settings of the mixing system and these scenes shall be nameable.

A comprehensive table of 'Scene Safes' shall be provided to prevent selected items from being changed from their state when the safe was enabled.
A comprehensive scene filter shall be provided per scene to Allow / Block each parameter saved in a scene from being changed as that scene is recalled.

An option shall be provided for password protection for log-in of several users with different levels of system access and permissions. A particular scene may be chosen to be recalled per change of user-login if desired.




The mixing system shall periodically record all current settings and return the mixer to that state after reboot following a power-cycle.

The mixing control surface shall have a built in power supply accepting AC mains voltages of 100~240V, 50/60 Hz, 90W max via an earthed 3-pin IEC male connector mounted on the rear chassis. A Two Pole Push-Button switch shall be provided near the mains input.

Recommended operating temperature for the mixer shall be 5 to 35 degrees Celsius.

The mixer shall be the Allen & Heath SQ-6.

Dimensions

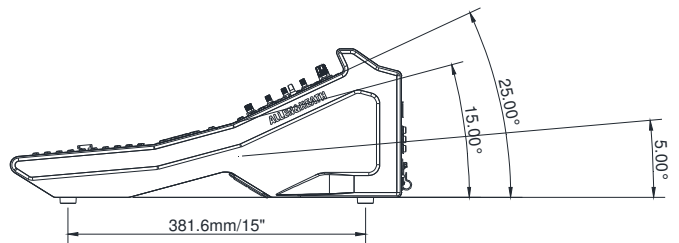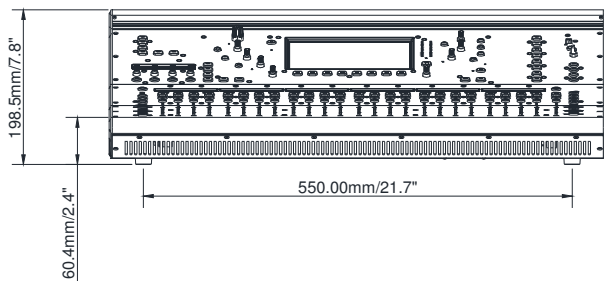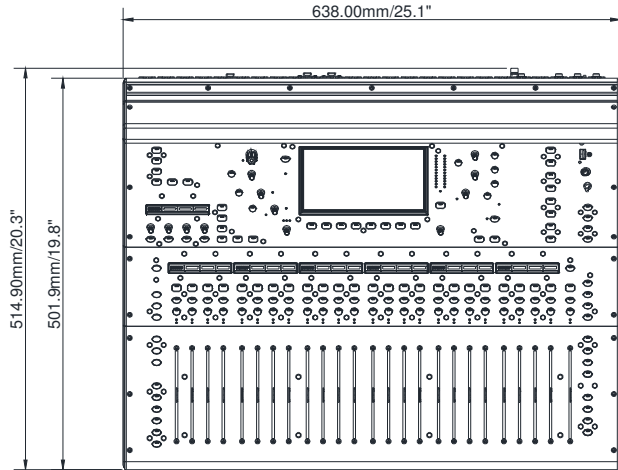


Block Diagram

SQ SYSTEM BLOCK DIAGRAM

Firmware V1.3

48 input channels x 36 bus Mix Engine

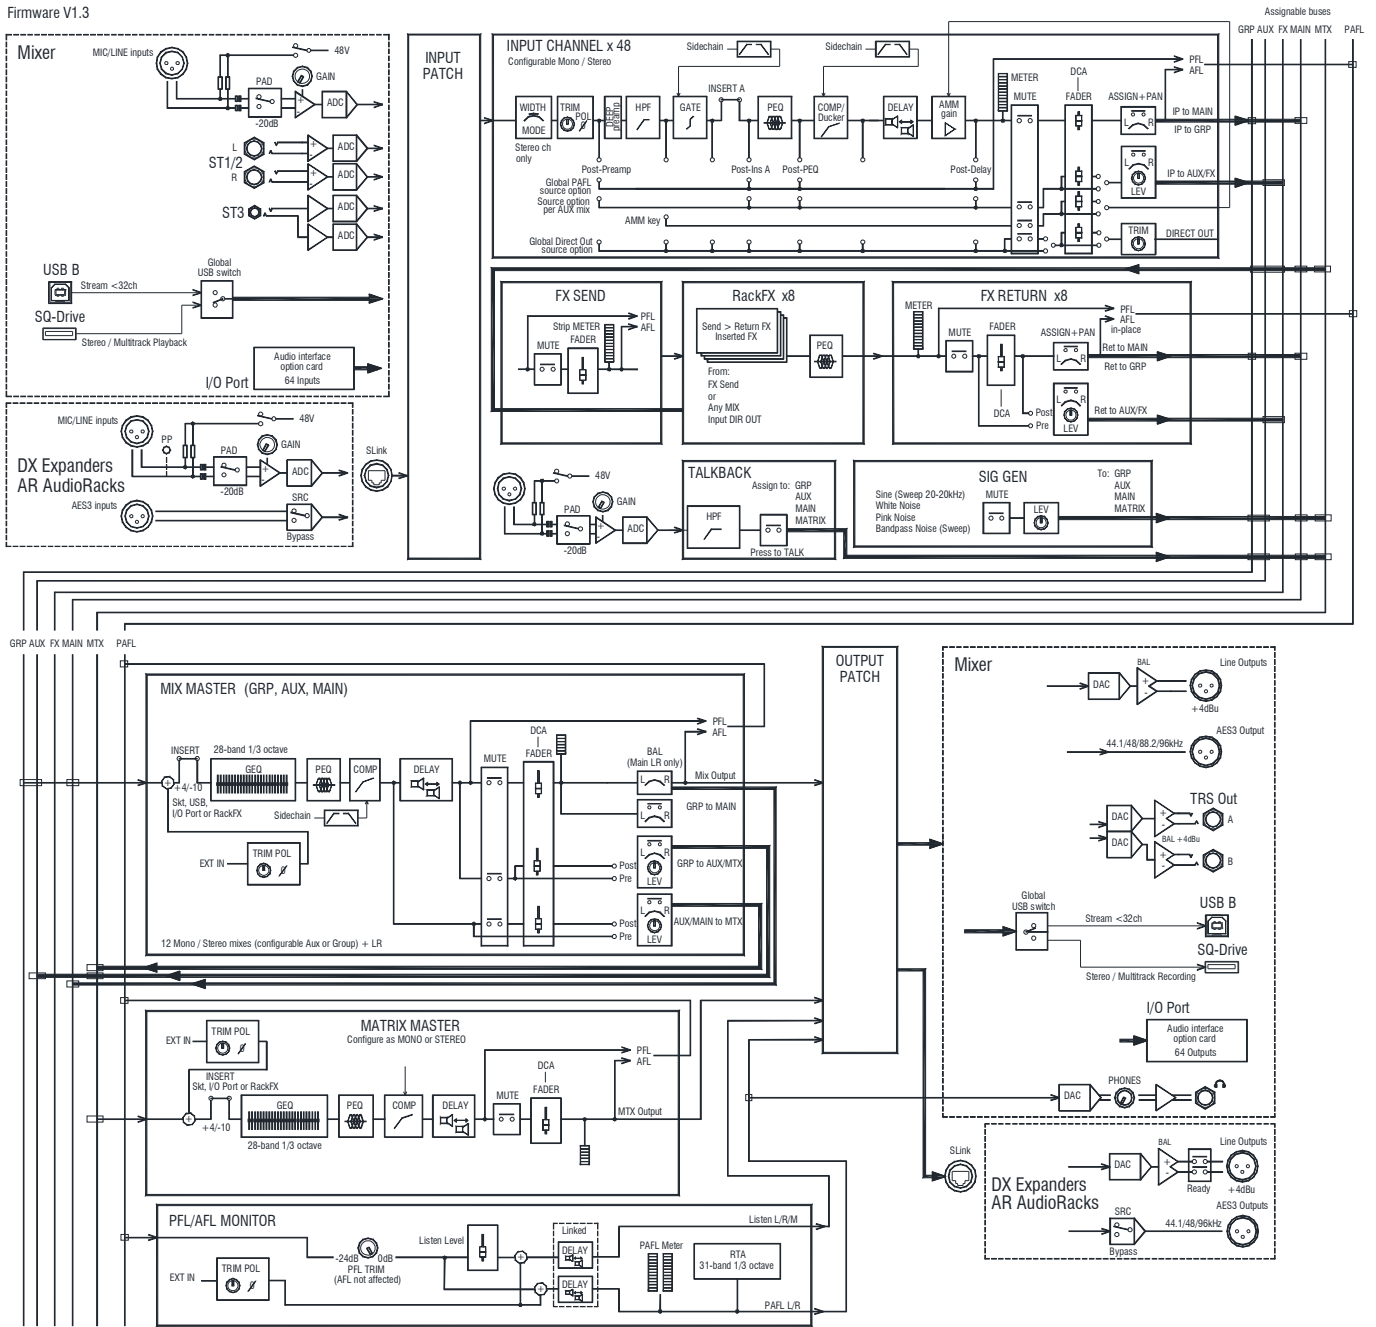

Mixer Specifications

| | | | |
|-------------------------------------|---|-----------------------------|--|
| Mic/Line Inputs | Balanced XLR, fully recallable | Faders | 100mm motorised |
| Input Sensitivity | -60 to +0dBu | Touch Screen | 7" Capacitive, 800 x 480 resolution, 24 bit RGB |
| Switchable Pad | -20dB | SoftKeys | 8 (SQ-5), 16 (SQ-6, SQ-7) |
| Analogue Gain | 0dB to +60dB, 1dB steps | SoftRotarys | 4 (SQ-6), 8 (SQ-7) |
| Maximum Input Level | +30dBu | Mute Groups / DCA Groups | 8 / 8 |
| Input Impedance | >5kΩ | Network | TCP/IP Ethernet for MIDI and Control |
| THD+N, Unity gain 0dB | 0.002% -92dBu (20Hz-20kHz, AES Direct Out, @0dBu 1kHz) | MIDI | TCP/IP and USB B |
| THD+N, Mid gain +30dB | 0.003% -91dBu (20Hz-20kHz, AES Direct Out, @-30dBu INPUT 1kHz) | Footswitch | Single or Dual, Momentary or Latching |
| Phantom Power | +48V (+3V / -2V) | | |
| Stereo Line Inputs | | Source | |
| ST1, ST2 connectors | Balanced, 1/4" TRS jack | CH1-48 | Fully patchable |
| ST3 connector | Unbalanced, stereo 3.5mm Mini Jack | USB Global Source | SQ-Drive or USB B Streaming |
| Input Sensitivity (ST1, ST2 / ST3) | Nominal +4dBu ST1, ST2 / 0dBu ST3 | | |
| Trim | +/-24dB | Polarity | Normal/Invert |
| Maximum Input Level (ST1,ST2 / ST3) | +22dBu / +18dBu | Trim | -24 to +24dB |
| Input Impedance | >7kΩ | High Pass Filter | 12dB/octave 20Hz – 2kHz |
| | | Insert (Pre EQ/Comp) | Fully Patchable |
| XLR Outputs | Balanced, XLR | Delay | Up to 341ms |
| Outputs A and B | Balanced 1/4" TRS Jack | | |
| Source | Patchable | Gate | Patchable Sidechain |
| Output Impedance | <75Ω | Sidechain filter | Hi-pass (20-5k), band-pass (120-10k), Lo-pass (120-20k) |
| Nominal Output | +4dBu = 0dB meter reading | Threshold / Depth | -72dBu to +18dBu / 0 to 60dB |
| Maximum Output Level | +22dBu | Attack / Hold / Release | 50µs to 300ms / 10ms to 5s / 10ms to 1s |
| Residual Output Noise | -90dBu (muted, 20Hz-20kHz) | | |
| | | PEQ | 4-Band fully parametric, 20-20kHz, +/-15dB |
| AES Digital Output | Balanced XLR 2 channel, | Band 1, Band 4 | Selectable Shelving (Baxandall), Bell |
| | 96kHz sampling rate (Default with SRC Bypassed) | Band 2, Band 3 | Bell |
| | Switchable output sample rates, 44.1kHz/ 48kHz/ 88.2kHz/ (96kHz) | Bell Width | Variable Q, 1.5 to 1/9th octave |
| | 2.5Vpp balanced terminated 110Ω | | |
| | | Compressor | Patchable Sidechain |
| SLink | Neutrik EtherCON (RJ45) | Sidechain filter | Hi-pass (20-5k), band-pass (120-10k), Lo-pass (120-20k), Q=1 |
| dsnake mode (48kHz devices) | 64 channels assignable, compatible with AR2412, AR84, AB168, ME, Qu | Threshold / Ratio | -46dBu to 18dBu / 1:1 to infinity |
| dx mode (96kHz devices) | 32 channels assignable, compatible with DX168 | Attack / Release | 30µs to 300ms / 50ms to 2s |
| gigaACE (96kHz devices) | 128 channels assignable, compatible with dLive, SQ and DXHub | Knee | Soft/Hard |
| Inputs | Fully Patchable | Detector response | Peak/RMS switchable |
| Outputs | Fully Patchable | Parallel Path Compression | dry/wet -infin to 0dB |
| Sync/SRC | assignable as master audio sync for all modes, SRC 64 channel | | |
| | | Channel Direct Out | Follow Fader, Mute, Mute Group, DCA (global all ch) |
| I/O Port | Multi-channel I/O option module | Source select | Post-Preamp, Post-HPF, Post Gate, Insert Return, |
| Inputs | Fully Patchable | | Post PEQ, Post Comp, Post Delay |
| Outputs | Fully Patchable | | trim -infin to 10dB per channel |
| Sync/SRC | assignable as master audio sync | Insert (Pre EQ/Comp) | Fully Patchable |

| | | | |
|--|--|-------------------------------|---|
| Signal | Measured balanced XLR in to XLR out, 0dB gain, 0dBu input | Delay | Up to 682ms |
| Dynamic Range | 112 dB | GEQ | 28 bands 31Hz-16kHz, +/-12dB Gain, Constant 1/3 oct |
| Frequency Response | +0/-0.5dB 20Hz to 20kHz | PEQ | As Input PEQ |
| Headroom | +18dB | Compressor | As Input Compressor |
| Internal operating Level | 0dBu | | |
| THD+N, Mic/Line routed to Main L/R Out | Unity gain faders@0dB, 0.006%, -84dBu (20 - 20kHz) | Internal FX | 8 x RackFX engine, Send>Return or Inserted (4 dedicated fx bus) |
| dBFS Alignment | +18dBu = 0dBFS (+22dBu at XLR output) | Types | SMR Reverb, StereoTap Delay, Gated Reverb, ADT, BlueChorus, Symphonic Chorus, Flanger, Phaser |
| Meter Calibration | 0dB meter = -18dBFS (+4dBu at XLR out) | 8 dedicated Stereo FX returns | Fader, Pan, Mute, Routing to Mix/LR, 4-Band PEQ |
| Main Meter Type | 2 x 12 segment, fast (peak) response | | |
| Channel Meter Type | Chromatic Channel Metering, fully programmable colour/brightness | PAFL | PFL or stereo in-place AFL, 0 to -24dB Trim, PAFL Delay Up to 682ms |
| Peak Indication | -3dBFS (+19dBu at XLR out), multi-point sensing | Talkback | dedicated input, Assignable to any mix, Gain, Pad, 48V, 12dB/oct HPF |
| Sampling Rate | 96kHz | Signal Generator | Assignable to any mix, Sine/White/Pink/Bandpass Noise |
| Bit Depth | Uses XCVI core custom bit widths in algorithms, up to 96bits | RTA | 31-Bands 1/3 octave 20-20kHz, follows PAFL source |
| Latency | <0.7mS, Local Mic Input routed to Main L/R. (Direct, No Effects) | | |
| | | SQ-Drive | USB A |
| Operating Temperature Range | 0 deg C to 40 deg C (32 deg F to 104 deg F) | Stereo Record | 2 channel, WAV, 96kHz, 24-bit, source fully patchable |
| Mains Power | 100-240V AC, 50/60Hz | Stereo Playback | 1/2 channel, WAV, 44.1, 48, 96kHz 16,24-bit, source fully patchable |
| Max Power Consumption SQ-5/SQ-6/SQ-7 | 75W / 90W / 110W | Multitrack Record | 16 channel, WAV, 96kHz, 24-bit, track sources fully patchable |
| | | Multitrack Playback | 16 channel, WAV, 96kHz, 24-bit fully patchable |
| SQ-5 | Width x Depth x Height | | |
| Desk mounted | 440 x 514.9 x 198 mm (17.3" x 20.3" x 7.8") | USB Audio Streaming | USB B, Core Audio compliant, ASIO/WDM for Windows |
| Packed in shipping box | 610 x 680 x 360 mm (24" x 26.8" x 14.2") | Send (upstream) | 32 channel, 96kHz, 24-bit |
| Unpacked weight | 10.5 kg (23.1 lbs) | Return (downstream) | 32 channel, 96kHz, 24-bit |
| Packed weight | 14 kg (30.9 lbs) | | |
| SQ-6 | Width x Depth x Height | AMM | 2x 24ch or 1x 48ch, freely assignable |
| Desk mounted | 638 x 514.9 x 198 mm (25.1" x 20.3" x 7.8") | Mode | Gain Sharing |
| Packed in shipping box | 820 x 680 x 360 mm (32.3" x 26.8" x 14.2") | Sidechain Filter HPF / LPF | 12dB/octave 20Hz – 5kHz / 120Hz - 20kHz |
| Unpacked weight | 13.3 kg (29.3 lbs) | Priority | -15dB to +15dB per channel |
| Packed weight | 17.3 kg (38.1 lbs) | | |
| SQ-7 | Width x Depth x Height | | |
| Desk mounted | 804 x 514.9 x 198 mm (31.7" x 20.3" x 7.8") | | |
| Packed in shipping box | 960 x 685 x 360 mm (37.8" x 27" x 14.2") | | |
| Unpacked weight | 17.8 kg (39.3 lbs) | | |
| Packed weight | 21.9 kg (48.3 lbs) | | |