




Artist T3 Full Range Speaker

Artist T3 full-range loudspeaker adopts customized neodymium speaker, delivering high SPL with a very compact size cabinet.


Artist T3 is equipped with a wall mount bracket to adjust the angle horizontally and vertically;

With stand alone Artist T-Box40, Artist T3 can switch for impedance and voltage output. 1 Artist T-Box40 can be used with up to 4 Artist T3 full-range speakers.

Artist T3 Frequency Response Curve

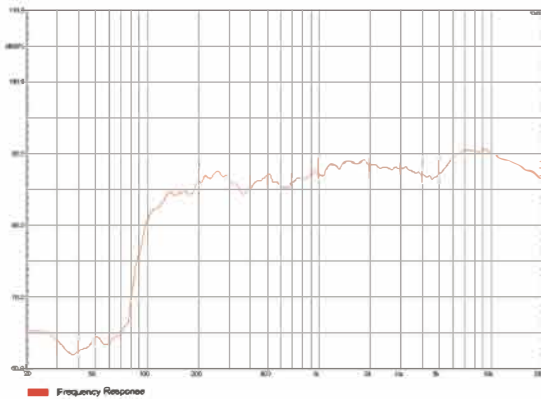

With stand alone Artist T-Box40, Artist T3/T4 can switch for impedance and voltage output. 1 Artist T-Box40 can be used with up to 4 Artist T3/T4 full-range speakers.



Artist T4 Full Range Speaker


Artist T4 full-range loudspeaker adopts customized neodymium speaker, delivering high SPL with a very compact size cabinet.

Artist T4 adopts unique T-eye™ design, using two dome tweeters, and the array layout is assembled in the center front of the speaker, which makes the speaker with wider frequency response, larger near-field coverage and smoother sound.

Artist T4 is equipped with a wall mount bracket to adjust the angle horizontally and vertically.

With stand alone Artist T-Box40, Artist T4 can switch for impedance and voltage output. 1 Artist T-Box40 can be used with up to 4 Artist T4 full-range speakers.

Artist T4 Frequency Response Curve

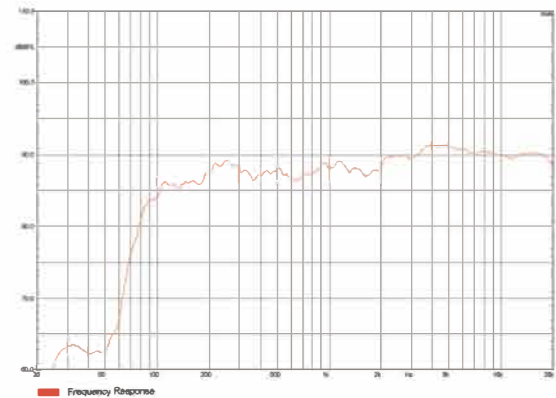

	Frequency Response (-6dB anechoic chamber)	Coverage Angle (HxV)	Power(AES)	Voltage Power	Maximum Calculated SPL/1M	Rated Impedance	Cabinet Color	Dimension (WxHxD)	Net Weight
Artist T3	110Hz-20KHz	110°x100°	40W	/	113dB	16Ω	Black/White	121x133x138mm	1.0Kg
Artist T3+ Artist T-Box40	/	/	/	70V 40W/20W/10W/5W 100V 40W/20W/10W	/	/	/	/	/
Artist T4	100Hz-20KHz	110°x100°	60W	/	116dB	16Ω	Black/White	154x174x158mm	2.0Kg
Artist T4+ Artist T-Box40	/	/	/	70V 40W/20W/10W/5W 100V 40W/20W/10W	/	/	/	/	/

Black is standard and default color. Consult with Audiocenter sales team for other customized colors.