

DBP

Digital Belt Pack

The Digital Belt Pack (DBP) is one of RTS' initial offerings in the wired digital party line solution space. The DBP provides TALK and LISTEN capability for up to four configurable audio conferences. In addition, the keys can be assigned for dedicated resources such as relay control.

When operating as a digital party line device, the DBP connects to the OMNEO Main Station (OMS). The DBP can also be connected directly via OMNEO to any of RTS' matrix products. This includes OMI cards in ADAM (or ADAM-M) frames or OMNEO ports on ODIN frames. When connected to an RTS OMNEO matrix, the DBP acts as a wired, 4-button keypad. The DBP automatically determines the correct mode of operation (digital party line connection to OMS or keypad connection to the matrix) at power on.


The DBP recovers power over an 802.3af or 802.3at compliant switch. One Ethernet port (PoE In) connects to PoE compliant power sourcing equipment. A second port (PoE Out) is available for daisy chain connections to other DBPs. The DBP comes in a rugged, over-molded enclosure which is IP-53 compliant. It has a full-color TFT display and an icon-based menu interface which allows for local configuration of key customer preferences.



Features

- Incorporates both XLR and 3.5mm TRRS connectors for headsets which are available in 3 different headset XLR options: 4-pin female, 4-pin male, and 5-pin female. The 5-pin female headset supports stereo audio.
- PoE powered via an 802.3af or 802.3at managed switch or PoE injector. Contains a PoE In and PoE Out port which allows up to 6 DBPs to be daisy-chain connected to the same PoE(+) switch port.
- Supports Bluetooth audio connectivity to a streaming audio device or mobile phone using either an IO Gear GBU522 dongle or an LM Technologies LM506 dongle.
- DBP can be connected to the OMNEO main station (Digital Partyline) or an OMNEO capable matrix (OMI card or ODIN). DBP can support up to four active Party Lines. 40 DBP's can be connected to OMS (based on the model), 64 DBP's can be connected to one OMI card (based on the model), 128 DBP's can be connected to one ODIN (based on the model).
- Incoming CALL notifications via audible alerts or haptic vibration.

Line Drawing

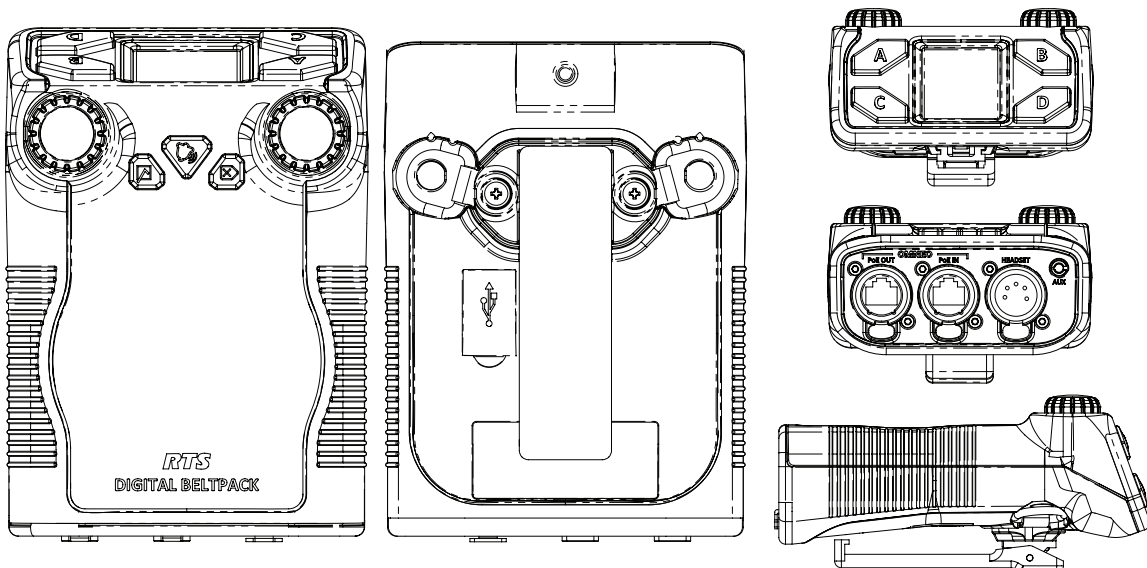

Specifications

Power Supply:

DC PoE..... 802.3af / 802.3at
Maximum Power
Consumption4.0W (PoE DC Input)

Environmental:

Operating
Temperature32° F – 122° F (0° C – 50° C)
5% to 90% relative humidity
Storage
Temperature-4° F – 158° F (-20° C – 70° C)
15% to 90% relative humidity

Dimensions:

5.51 in. (140mm) L x 3.94 in. (100mm) W x 2.64 in. (67mm) D

Weight:

DBP 0.75 lbs (340 g)

Microphone Pre-Amplifier:

XLR Input:

Electret Mic Input.....-42.5 dBu Nominal
Dynamic Mic Input.....-50 dBu Nominal
Frequency Response 100 Hz to 16 kHz

3.5mm Input:

Electret Mic Input.....-42.5 dBu Nominal
Frequency Response 100 Hz to 16 kHz

Headphone Amplifier:

Frequency Response 100 Hz to 16 kHz

OMNEO Ports (PoE In and PoE Out):

Maximum Capacity.....2 Full-duplex ports
Copper Connector TypeRJ-45
FormatIEEE 802.3 compliant
Copper Ethernet Speed.....100/1000 Mbps

Bluetooth:

Bluetooth Version 4.0
Approved dongles.....IO Gear GBU522
LM Technologies LM506
Range 15 ft (5 m)
Audio Codec.....SBC

TFT Display:

Active Area27.72 mm (wide) x 27.72 mm (high)
Dot Resolution..... 240 x 240 pixels
Color Resolution..... 16-bit (64K) RGB color
View Angle..... 80° (typical, all directions)
Protective Lens..... Anti-Glare / Anti-Reflective

Approvals:

- CE Compliant
- UL Certified



F.01U.380.825 - DBP Technical Manual

F.01U.394.663 - DBP Quick Install Guide

F.01U.380.819 - OMS Installation Manual

F.01U.380.820 - OMS Technical Manual - https://products.rtsintercoms.com/binary/OMS_om_F01U380820_en.pdf

F.01U.345.091 - ODIN Installation Manual

F.01U.345.086 - ODIN Technical Manual - <https://products.rtsintercoms.com/binary/F01U345086.pdf>

F.01U.273.977 - OMI Quick Start Guide - <https://products.rtsintercoms.com/binary/F01U273977.pdf>

F.01U.261.047 - OMI Technical Manual - <https://products.rtsintercoms.com/binary/F01U261047.pdf>

Order Information

Order No.	Description
DBP 4M	IP 4ch beltpack 4M headset
DBP 4F	IP 4ch beltpack 4F headset
DBP 5F	IP 4ch beltpack 5F headset

The specification information is subject to change without notification. Brand names mentioned are the property of their respective companies.