


SWATCHBOOK: ROSCOLUX
COLOR FILTER: #35 LT PINK
DESCRIPTION: Color Effects Lighting Filter.
TRANSMISSION = 66% or -0.6 stop loss
MIRED SHIFT = Not Applicable.
CC EQUIVALENT = Not Applicable.

COLORIMETRIC DATA

OBSERVER: CIE 1964 10°
SOURCE:

- 'A' (tungsten)
- 'D65' (daylight)

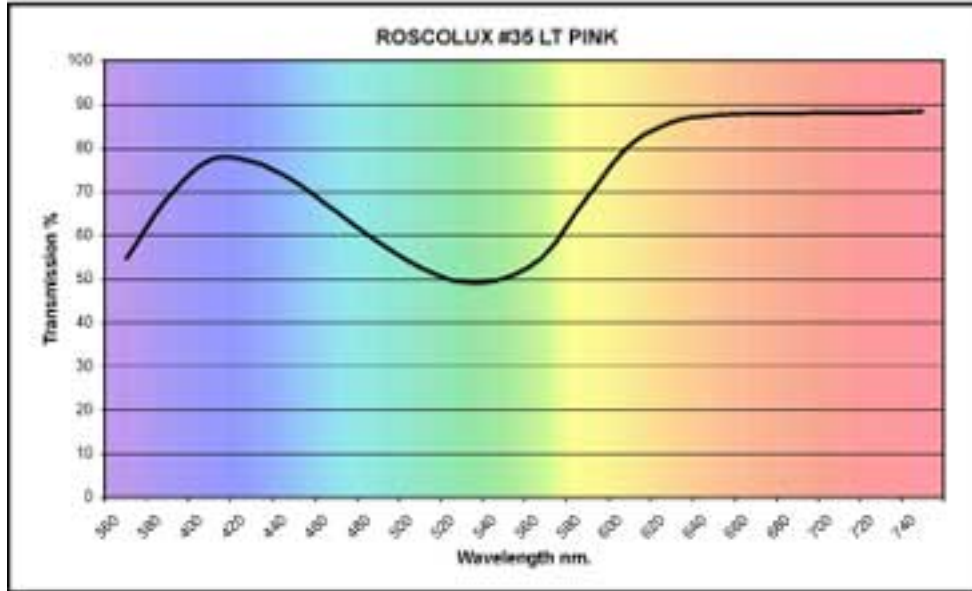


HUNTER LAB SOURCE A	
L*	84.934
A*	19.816
B*	-0.305

HUNTER LAB SOURCE D65	
L*	82.746
A*	22.085
B*	-5.565

CIE 1964 SOURCE A	
Y	85.878
(x)	0.480
(y)	0.383

CIE 1964 SOURCE D65	
Y	61.686
(x)	0.335
(y)	0.303

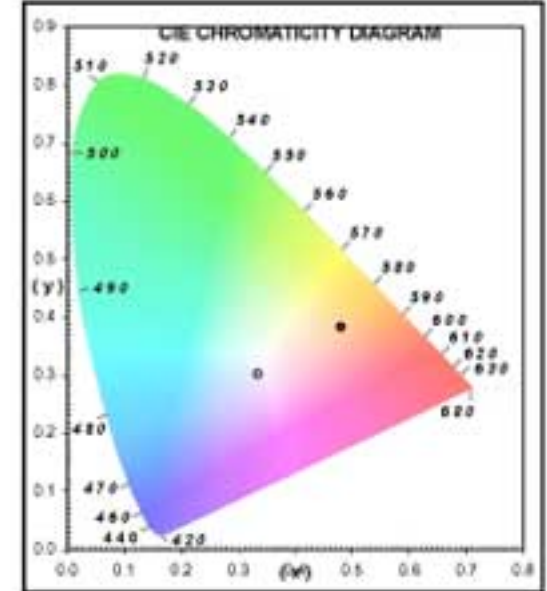

nm.	360	380	400	420	440	460	480	500	520	540	560	580	600	620	640	660	680	700	720	740
trans %	55	69	77	77	73	66	59	53	49	50	56	69	80	86	88	88	88	88	88	85

MATERIAL SPECIFICATIONS:

General Description: Co-extruded Polycarbonate Film
Substrate: PC (Polycarbonate)
Thickness: 3.0 mil (.003" or 76.2 micron)

Manufactured in: U.S.A.

AVAILABLE SIZES:

- ✓ 20 in. x 24 in. sheets (50cm x 60cm)
- ✓ 24 in. x 25 ft. rolls (60cm x 7.62m)
- 48 in. x 25 ft. rolls (121cm x 7.62m)
- 60 in. x 20 ft. rolls (152.4cm x 6.10m)
- 13.5 in. Diameter Glass (34.3cm) - Cut to order